

ASH DATA

CAT 6A U/UTP PVC or LSZH SHEATH


COMMUNICATION LAN CABLES

APPLICATION:

- LAN cable used in a horizontal or vertical configuration, it constitutes the base of a voice, data. Suitable for building structured cabling supports IP-based security and building automation systems that supports 500 Mbit/sec, (U/UTP Unshielded Twisted Pair Cable)

CONSTRUCTION DETAILS

Reference Standard	ANSI TIA 568-C.2 CAT 6A & ISO/IEC 11801, IEC-61156-5		
Conductor Material	Plain annealed Copper to ASTM B3,		
Conductor Size	23 AWG Solid conductors.		
Insulation	Extruded Polyethylene compound.		
Insulation color	Pair No.	Conductor	Conductor
		A	B
	1	White/Blue Strip	Blue
	2	White/Orange Strip	Orange
	3	White/Green Strip	Green
	4	White/Brown Strip	Brown
Pair formation	Two insulated conductors are uniformly twisted to form a pair, twisted with suitable lay.		
Assembly	Pairs twisted with staggered lay technique. Twisted pairs are assembled with a cradle separator.		
Outer Sheathing	Extruded Flame-Retardant Polyvinyl chloride (PVC) compound. Extruded Low Smoke Zero Halogen (LSZH) Flame Retardant compound. (Indoor application)		
Rip Cord	Yes, under sheath.		
Marking (Ink Jet Printing)	ASH DATA CAT 6A U/UTP 4P X 23 AWG CU/PE/PVC ANSI/TIA 568-C.2 ISO/IEC 11801 ASHCABLES MADE IN KSA (Year of Manufacturing)		
Cable Cross sectional drawing	Figure 1		

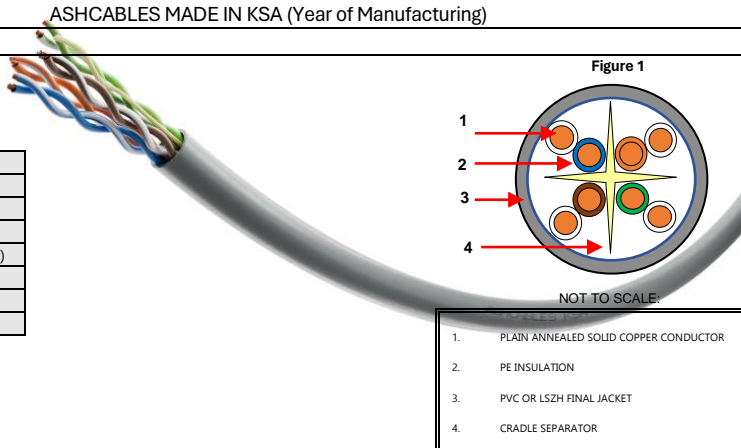

ELECTRICAL PROPERTY

Conductor Size	23 AWG
Conductor DC Resistance @ 20°C	≤93.8 (Ω/km)
Resistance Unbalance (Max.)	2%
Capacitance (conductor to conductor)(nom.)	56 nF/km
Insulation Resistance (Min.)	5000 MΩ/Km (500 Volts / 1 Min.)
Dielectric Strength	1.7 kVDC for 2 Seconds
Nominal Velocity of Propagation	68%
Characteristic Impedance (MHz)	100 ± 15

DIMENSIONAL DATA SHEET

S/N	ASH CABLES ITEM CODE	SIZE	OUTER SHEATH THICKNESS NOM. (mm)	APPRX. CABLE DIAMETER (mm)	Approx. Cable Weight (kg/km)	Standard Length (feet/mts)
		No. of Pairs X size (AWG)				
1	D8A6-04P23AWG-UGRXA	4P X 23AWG	0.50	6.60	45	1000/305

Dimensions and Weights are subject for manufacturing Tolerance.
Diameter Tolerance: ± 1.0 mm

PERFORMANCE CHARACTERISTICS

Frequency (Mhz)	Max. Attenuation (dB/100m)	Return Loss (RL) dB (min)	NEXT LOSS (dB)(min)	PSNEXT LOSS (dB)(min)	ELFEXT (ACRF) dB/100m (Min)	PSELFEXT (PS ACRF) dB/100m (Min)	Propagation Delay ns/100m (Max)
1	2.0	20.0	47.3	72.3	67.8	64.8	570
4	3.8	23.0	65.3	63.3	55.8	52.8	552
8	5.3	24.5	60.8	58.8	49.7	46.7	547
10	5.9	25.0	59.3	57.3	47.8	44.8	545
16	7.5	25.0	56.2	54.2	43.7	40.7	543
20	8.4	25.0	54.8	52.8	41.8	38.8	542
25	9.4	24.3	53.3	51.3	39.8	36.8	541
31.25	10.5	23.6	51.9	49.9	37.9	34.9	540
62.5	15.0	21.5	47.4	45.4	31.9	28.9	539
100	19.1	20.1	44.3	42.3	27.8	24.8	538
200	27.6	18.0	39.8	37.8	21.8	18.8	537
250	31.1	17.3	38.3	36.3	19.8	16.8	536
300	34.5	16.8	37.1	35.1	18.3	15.3	536
400	40.1	15.9	35.3	33.3	15.8	12.8	536
500	45.3	15.2	33.8	31.8	13.	10.8	536

FLAME BEHAVIOUR, MECHANICAL & ENVIRONMENTAL PROPERTY

Operating Temperature	-20°C to 70°C
Bending Radius	8 X Cable Outer Diameter
Flame Retardance	Pass Flame retardant test requirement as per IEC:60332-1

PACKING	1000FT/305M Spool
	Each spools/drum shall be marked with ASH cables standard practice.